



CARATTERISTICHE TECNICHE
TECHNICAL CHARACTERISTICS
TECHNISCHES DATENBLATT
FICHA TÉCNICA
CARACTÉRISTIQUES TECHNIQUES

TOPZSTONE

by Guidoni













CARATTERISTICHE TECNICHE - TECHNICAL CHARACTERISTICS - TECHNISCHES DATENBLATT

FICHA TÉCNICA - CARACTÉRISTIQUES TECHNIQUES - FICHA TÉCNICA

QUARZO/RESINA • QUARTZ/RESIN • QUARZ/KUNSTHARZ • CUARZO/RESINA • QUARTZ/RÉSINE • QUARTZO/RESINE


GRANITO-MARMO/RESINA • GRANIT-MARBLE/RESIN • GRANIT- MARMOR/KUNSTHARZ

GRANITO-MÁRMOL/RESINA • GRANITE-MARBRE/RÉSINE • GRANITO-MÁRMORE/RESINA

	CARATTERISTICA TECNICA CHARACTERISTICS EIGENSCHAFTEN CARACTERÍSTICAS CARACTÉRISTIQUES CARACTERÍSTICAS	NORMA STANDARD PRÜFMETHODE NORMA NORMES NORMA	UNITÀ DI MISURA UNIT EINHEIT UNIDAD UNITE UNIDADE	RANGE VALORI RANGE OF VALUES ERGEBNISSE RANGO DE VALORES VALEURS TABELA DE VALORES
	DENSITÀ DENSITY DICHTHE DENSIDAD DENSITÉ DENSIDADE	DIN 52102 ASTM C 97	KG/DM3	2,35 - 2,45
	ASSORBIMENTO DELL'ACQUA WATER ABSORPTION WASSERAUFNAHME ABSORCIÓN DE AGUA ABSORPTION D'EAU ABSORÇÃO DE ÁGUA	DIN 52103 ASTM C 97	% (MASSE) % (VOLUME)	<0,02 0,01 - 0,02
	RESISTENZA A FLESSIONE FLEXURAL STRENGTH (MODULUS OF RUPTURE) BIEGEFESTIGKEIT RESISTENCIA A LA FLEXIÓN RÉSISTANCE À LA FLEXION RESISTÊNCIA À FLEXÃO	DIN 52112 ASTM C 99	MPA MPA	40-58 41,3-56,8
	RESISTENZA A COMPRESIONE COMPRESSIVE STRENGTH DRUCKFESTIGKEIT RESISTENCIA A LA COMPRESIÓN RÉSISTANCE À LA COMPRESSION RESISTÊNCIA À COMPRESSÃO	ASTM C 170	MPA	150-240
	DUREZZA SUPERFICIALE SURFACE SCRATCH HARDNESS HÄRTE DUREZA DURETÉ SUPERFICIELLE DUREZA	EN 101	MOHS	6-7
	RESISTENZA ALL'ABRASIONE RESISTENCE TO DEEP ABRASION ABRIEB RESISTENCIA A LA ABRASIÓN RÉSISTANCE À L'ABRASION RESISTÊNCIA À ABRASÃO	DIN 52108 ASTM C 241 EN 102	CM3/50 CM2 INDEX MM²	6,0-10,0 58-63 116-165
	COEFF. DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL EXPANSION WÄRMEAUSSDEHNUNGSKOEFFIZIENT COEFICIENTE DE DILATACIÓN TÉRMICA LINEAL COÉFFICIENT DE DILATATION THERMIQUE LINÉAIRE COEFICIENTE DE DILATAÇÃO TÉRMICA LINEAR	DIN 53752	M/M°C	10-30-106
	STABILITÀ DIMENSIONALE DIMENSIONAL STABILITY MASSBESTÄNDIGKEIT ESTABILIDAD DIMENSIONAL STABILITÉ DIMENSIONELLE ESTABILIDADE DIMENSIONAL	METODO MAPEI* MAPEI METHOD* METHODO MAPEI* MÉTODO MAPEI* MÉTHODE MAPEI* MÉTODO MAPEI*	-	CLASS A
	RESISTENZA AI PRODOTTI CHIMICI (ACIDI) RESISTANCE TO CHEMICALS (ACIDS) SÄUREBESTÄNDIGKEIT RESISTENCIA A PRODUCTOS QUÍMICOS (ÁCIDOS) RÉSISTANCE AUX PRODUITS CHIMIQUES (ACIDES) RESISTÊNCIA A PRODUTO QUÍMICO (ÁCIDOS)	ASTM 650	-	INALTERATA NOT AFFECTED UNVERÄNDERT INALTERADA INALTÉRÉ INALTERADO
	RESISTENZA AL GELO FROST RESISTANCE FROSTBESTÄNDIGKEIT RESISTENCIA AL HIELO RÉSISTANCE AU GEL RESISTÊNCIA AO GELO	DIN 52104-B TEIL 1	-	CONFORME COMPLIES WITH THE STANDARDS GEMÄSS DIN CONFORME CONFORME AUX NORMES CONFORME
	COMPORTEMENTO A FUOCO COMBUSTION REACTION BRENNBARKEITSKLASSE REACCIÓN A LA LLAMA REACTION SU FEU REAÇÃO À CHAMA	DIN 4102 TEIL 1	-	B1
	IDONEITÀ USO AMBIENTE CUCINA SUITABILITY FOR USE IN KITCHENS EIGNUNG FÜR KÜCHENARBEITSPLETTEN ADEQUADO PARA SER USADO EN COCINA APTITUDE À L'UTILISATION EN CUISINES ADEQUADO PARA SER USADO EM COZINHA	EMPFEHLUNG XXII BGW DIN68930	-	IDONEO SUITABLE GEEIGNET ADEQUADO APPROPRIÉ ADEQUADO

*PROVE INTERNE - *IN HOUSE TESTING - *INTERNER TEST - *PRUEBA INTERNA - *TEST INTERNE - *PROVAS INTERNAS

STANDARD SIZES

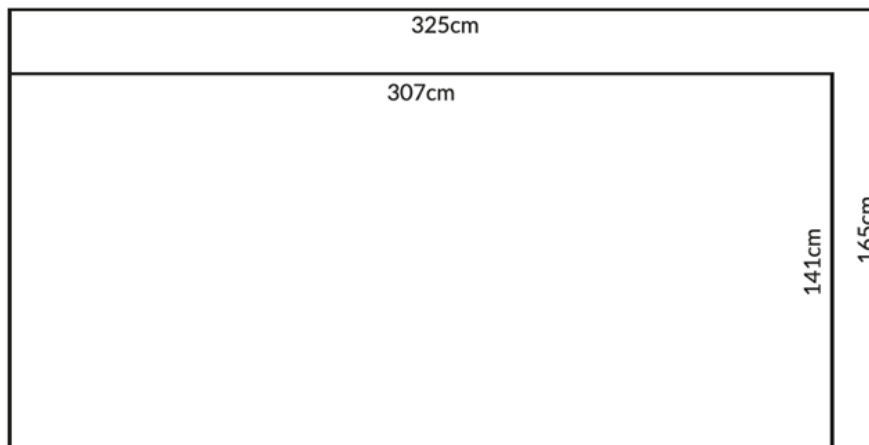

LOS DATOS DE LA TABLA SON INDICATIVOS Y NO VINCULANTES. A PEDIDO SE ENTREGARÁN LOS CERTIFICADOS DE PRUEBA ESPECÍFICOS.
LES DONNÉES SUSMENTIONNÉES SONT INDICATIVES ET NE NOUS ENGAGENT PAS. SUR DEMANDE, DES CERTIFICATS D'ESSAIS SPÉCIFIQUES SERONT FOURNIS. THE ABOVE DATE MENTIONED IN THE TABLE ARE OF GENERAL INFORMATIONAL NATURE. WHEN REQUESTED, THE SPECIFIC CERTIFICATES OF EACH PRODUCT WILL BE SENT, THUS ENSURING ADEQUATE TECHNICAL DATA. OS DADOS ACIMA MENCIONADOS DAS TABELAS FORNECEM APENAS ELEMENTOS INFORMATIVOS DE CARÁTER GERAL. SERÃO ENVIADOS, A PEDIDO, CERTIFICADOS ESPECÍFICOS DE CADA PRODUTO, GARANTINDO ASSIM, DADOS TÉCNICOS ADEQUADOS.

TOPZSTONE

by Guidoni

BR

Rodovia Gether Lopes de Farias, S/N km 48 - Zona Rural
29745-000 São Domingos do Norte - ES - Brasil
+55 27 3742-0100

R. Raul Nassar, 616 - Waldir Furtado de Amorim
29313-825 Cachoeiro de Itapemirim - ES - Brasil
+55 27 3742-0100

IT

Via I Maggio 2 37010
Cavaion VR Italia
+39 045 7238299

ES

Polígono Industrial As Lagoas - Carretera de Cedeira km 2
15570 Narón, A Coruña - España
+34 981932922

WWW.GUIDONI.COM.BR
WWW.TOPZSTONE.COM

